


MSR0810

8inch RMS 175watt

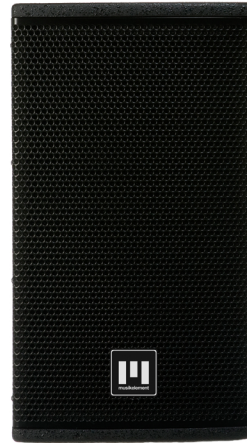

Specification

- Frequency Response (1W@1m)	: (± 3 dB) : 90Hz~20KHz : (-10dB) : 80Hz~22KHz
- Axial Sensitivity(dB SPL, 1W@1m)	: 96
- Impedance(Ohms) Full Range	: 8
- Power Handling RMS/PROGRAM/PEAK(Watts)	: 175/350/700
- Calculated Maximum Output	: Full Range Peak : 110 : Full Range Long Term : 105
- Nominal Coverage Angle/-6dB points(Degrees)	: Horizontal : 90, Vertical : 90
- System configuration	: Two-way full range
- Powering	: Passive(LF/HF crossover)
- LF subsystem	: 8" Woofer \times 1
- HF subsystem	: 1" HF system protection circuit / Ferrofluid oil coolant
- Enclosure Materials	: High intensity 15mm wood
- Finish/ color	: Water resistant textured black paint
- Connectors	: NL4 Speakon \times 2
- Hardware	: Bottom : Suspend Point \times 2, Rear : Suspend Point \times 1, Right/Left : Suspend Point \times 2
- Grille	: Power coated perforated steel, foam backed.
- Weight	: Net. 8.2Kg, Gross. 9.5Kg
- Dimensions(W \times H \times D)	: 9.7" \times 17.5" \times 9.3"(247mm \times 445mm \times 236mm)