


MSR1010

10inch RMS 250watt

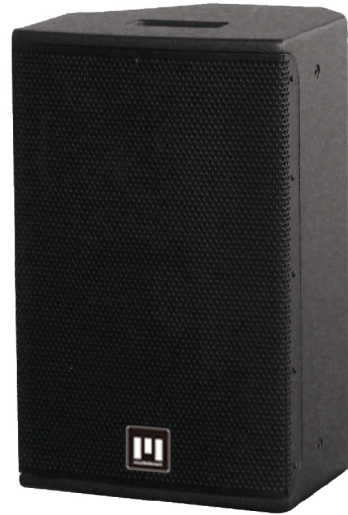

Specification

- Frequency Response (1W@1m)	: (± 3 dB) : 80Hz~20KHz
	: (-10dB) : 70Hz~22KHz
- Axial Sensitivity(dB SPL, 1W@1m)	: 97
- Impedance(Ohms) Full Range	: 8
- Power Handling RMS/PROGRAM/PEAK(Watts)	: 250/500/1000
- Calculated Maximum Output	: Full Range Peak : 115
	: Full Range Long Term : 110
- Nominal Coverage Angle/-6dB points(Degrees)	: Horizontal : 90,, Vertical : 90
- System configuration	: Two-way full range
- Powering	: Passive(LF/HF crossover)
- LF subsystem	: 10" Wooferx1
- HF subsystem	: 1.4" HF system protection circuit / Ferrofluid oil coolant
- Enclosure Materials	: High intensity 15mm wood
- Finish/ color	: Water resistant textured black paint
- Connectors	: NL4 Speakonx2
- Hardware	: Bottom : SPK Stand Ple Socket, Rear : Suspend Pointx1
	Right/Left : Suspend Pointx2
- Grille	: Power coated perforated steel, foam backed.
- Weight	: Net. 11.9Kg,,Gross. 13.7Kg
- Dimensions(WxHxD)	: 12.6"x20.4"x11.8"(320mmx517mmx300mm)